

Order / Quote Form

ORDER

QUOTE

ACCOUNT No.

Date:

Company Name:

Order Number:

JOB REFERENCE:

Company Contact:

Telephone No:

Email:

Delivery Address:

Postcode:

Delivery Date Req:

Quotation Ref:

CRITICAL INFORMATION

* Site Postcode (required for structural snow / wind loading)

Postcode:

How to place an order for Flat Roof:

STEP 1: DRAW YOUR ROOF

Draw a diagram of the roof with the external base size, internal apertures, mark off outlets and any soil pipes.

Please label each elevation as per your plan drawing (A, B, C, etc). For all elevations please include wall and frame thickness in mm (where applicable).

Please mark the apertures on the plan along with the dimensions for the aperture, internal size. Please use the key below to mark your apertures e.g. a lantern and/ or flat skylight.

Please mark any outlets and soil pipes, add on any dimensions.

If possible, please send any photo's or additional plans to your order.

KEY



Lantern



Outlets / Downpipes



Flat Skylight



Soil pipe

Draw Roof

The maximum external base size 7000mm x 4000mm (4m projection). The Flat Roof is only available on square / rectangles sizes. You can specify 0, 1 or 2 apertures. Maximum: front opening up to 5670mm and side up to 3220mm.

Please return to

flatroofsales@ultraframe.co.uk

Order / Quote Form

JOB REFERENCE:


STEP 2: MARK YOUR ELEVATIONS AND INDICATE THE FOLLOWING:

Please mark on the drawing plan below

- What the roof is sitting on e.g. frame or brick
- Thickness of frame or brick
- Height of wall - standard eaves height is 2400mm unless specified.
- Opening location and size

If you would like a visual representation of your design, please confirm the colours of your frames.

If structural posts are needed, would you like Ultraframe to supply yes no

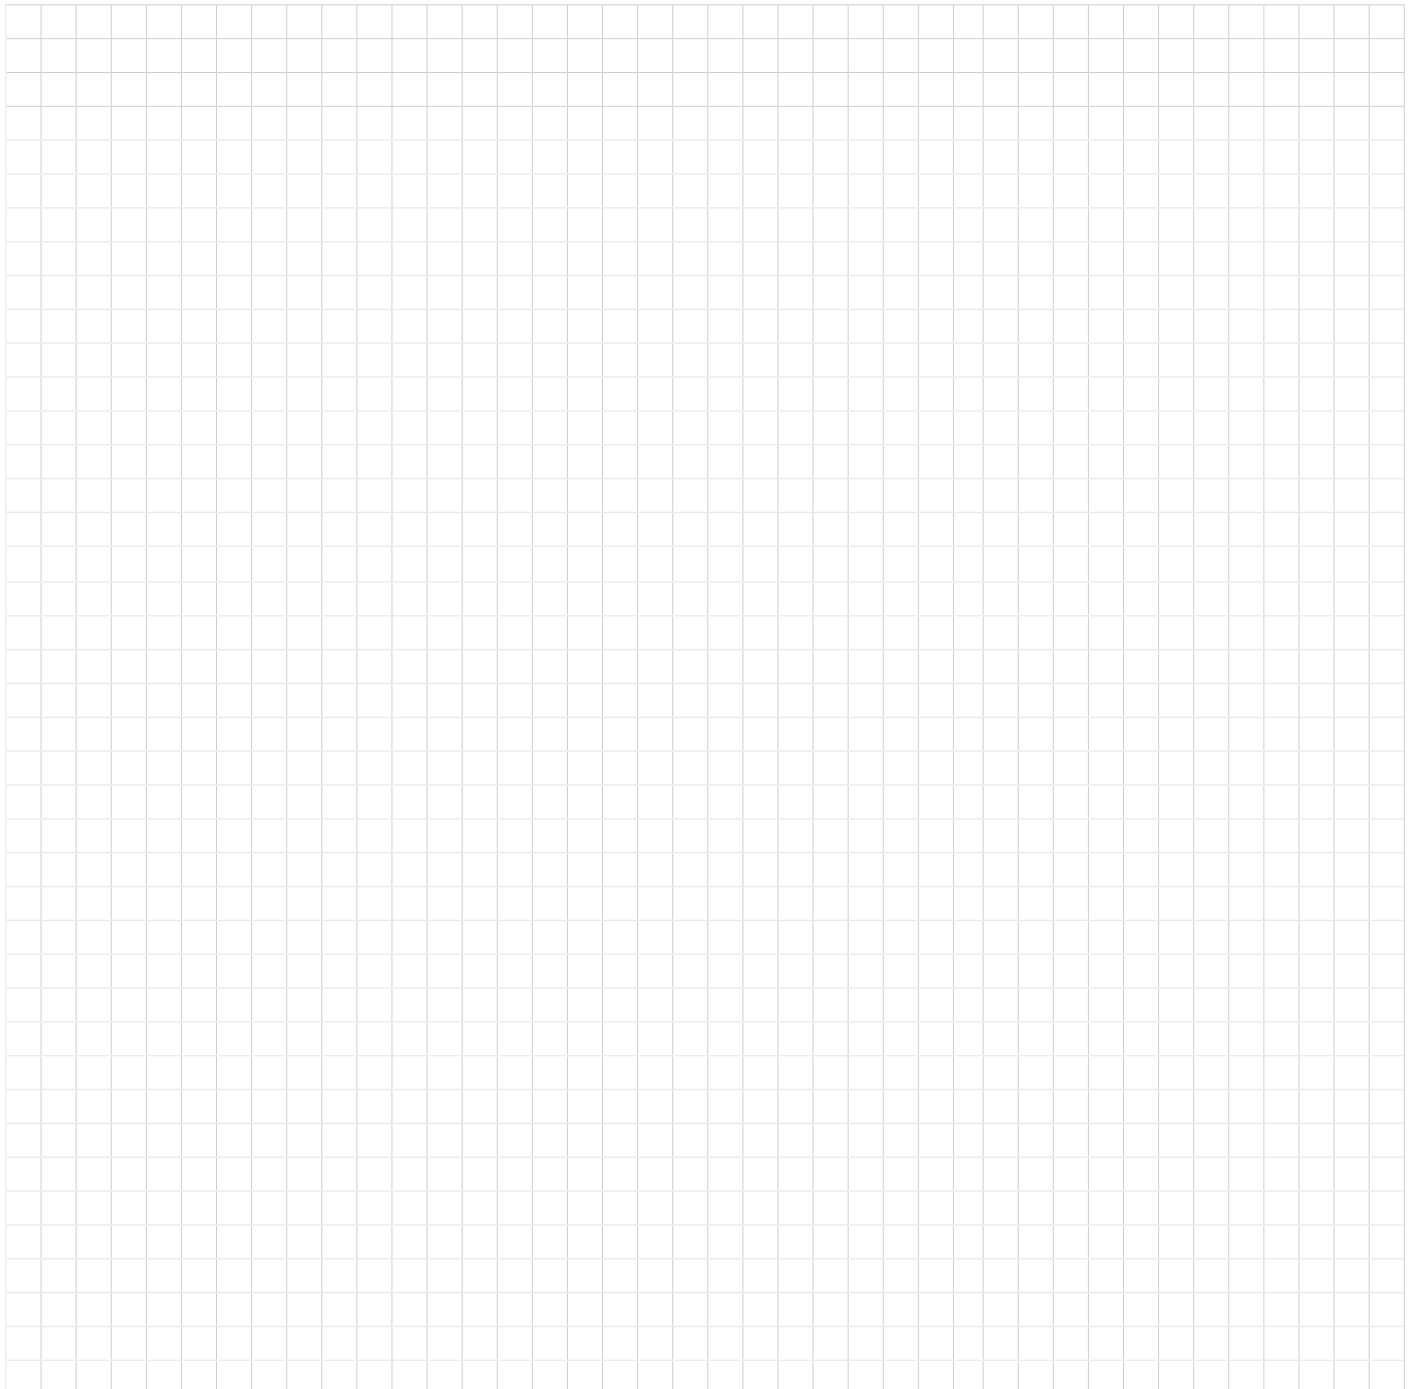

JOB REFERENCE:

STEP 3: SPECIFY YOUR LANTERN / FLAT SKYLIGHT

Lantern

ROOF MATERIALS PVCu White PVCu Painted Grey PVCu Black Aluminium 9003 White 80% gloss Aluminium 7016 Grey 30% gloss Aluminium 9005 Black 60% gloss

External

Internal

BESPOKE COLOUR

PVCu

Ali

External

RAL:

Internal

RAL:

GLASS OPTIONS - WARM EDGE SPACER

Conservaglass	Ultra86 Blue	Ultimate Blue	Blue 4S	Neutral 4S	Aqua 4S
	Bronze 4S				
Celsius	Celsius One	Celsius Elite	Celsius Clear		
	Unglazed				

ROTABOND SEALANT - MS POLYMER

Black (NCGS001B)

No. Tubes Req:

N.B. For use with glass

ROOF VENTS AND MECHANISM

Manual with brass

Manual with chrome

Electric switch/mechanism

Electric with rain sensor / thermostat

Flat Skylight

COLOUR: RAL9005 - 60% Black

RAL9003 - 80% White

RAL7016 - 30% Grey

Bespoke RAL:

GLOSS %

GLASS OPTIONS: Standard, 26mm or 28mm (glass size dependent on skylight size)

Clear

Blue

STEP 4: CHOOSE YOUR SOFFIT

Please specify if you would like standard soffit or extended soffit.

Standard soffit

Extended soffit



Standard soffit



Extended soffit

STEP 5: FASCIA OPTION

Please specify what fascia option you would like.

Naked

Classic Fascia

Curved Cornice

Two Tier Flat Cornice

Four Tier Flat Cornice
(only available on standard soffit)



STEP 5A: PICK YOUR FASCIA COLOUR

Please specify your fascia, gutter and cornice colour.

Fascia and gutter colour

White

Other:

Cornice colour

White

Other:

Please note that roof membrane is not supplied and must be ordered separately. The Flat Roof System is compatible with most roof finishes such as GRP, EPDM or PVC membranes.

Please return to

flatroofsales@ultraframe.co.uk


Order Form

Tick this box if you would like to order hup! walls with your roof

hup! Wall Specification:

1. Footprint

Please draw the footprint of your building marking each elevation A, B, C, D etc. You should **use the base datum** which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. See specification guide for more details.

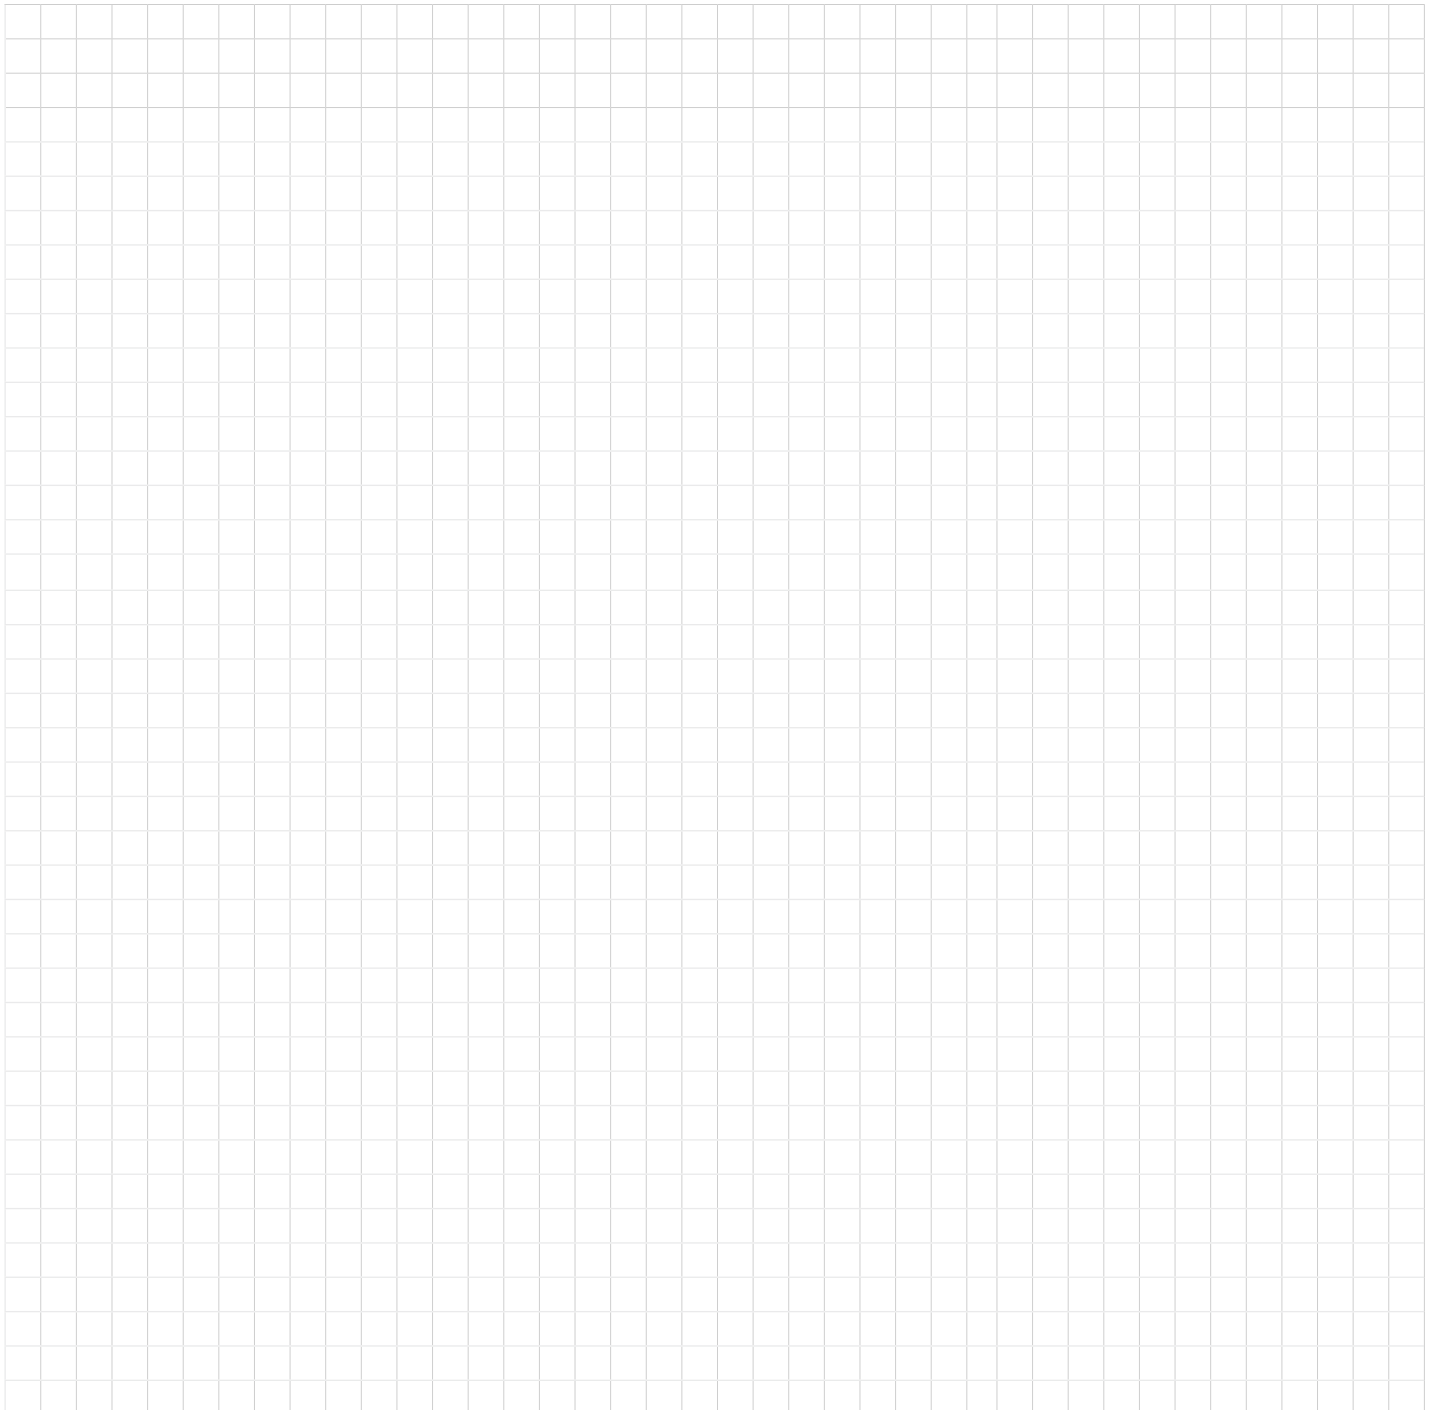


Please note hup! walls will protrude at least 48mm (3mm for membrane and clips, 25mm for battens and 20mm for claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Order Form

2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels.

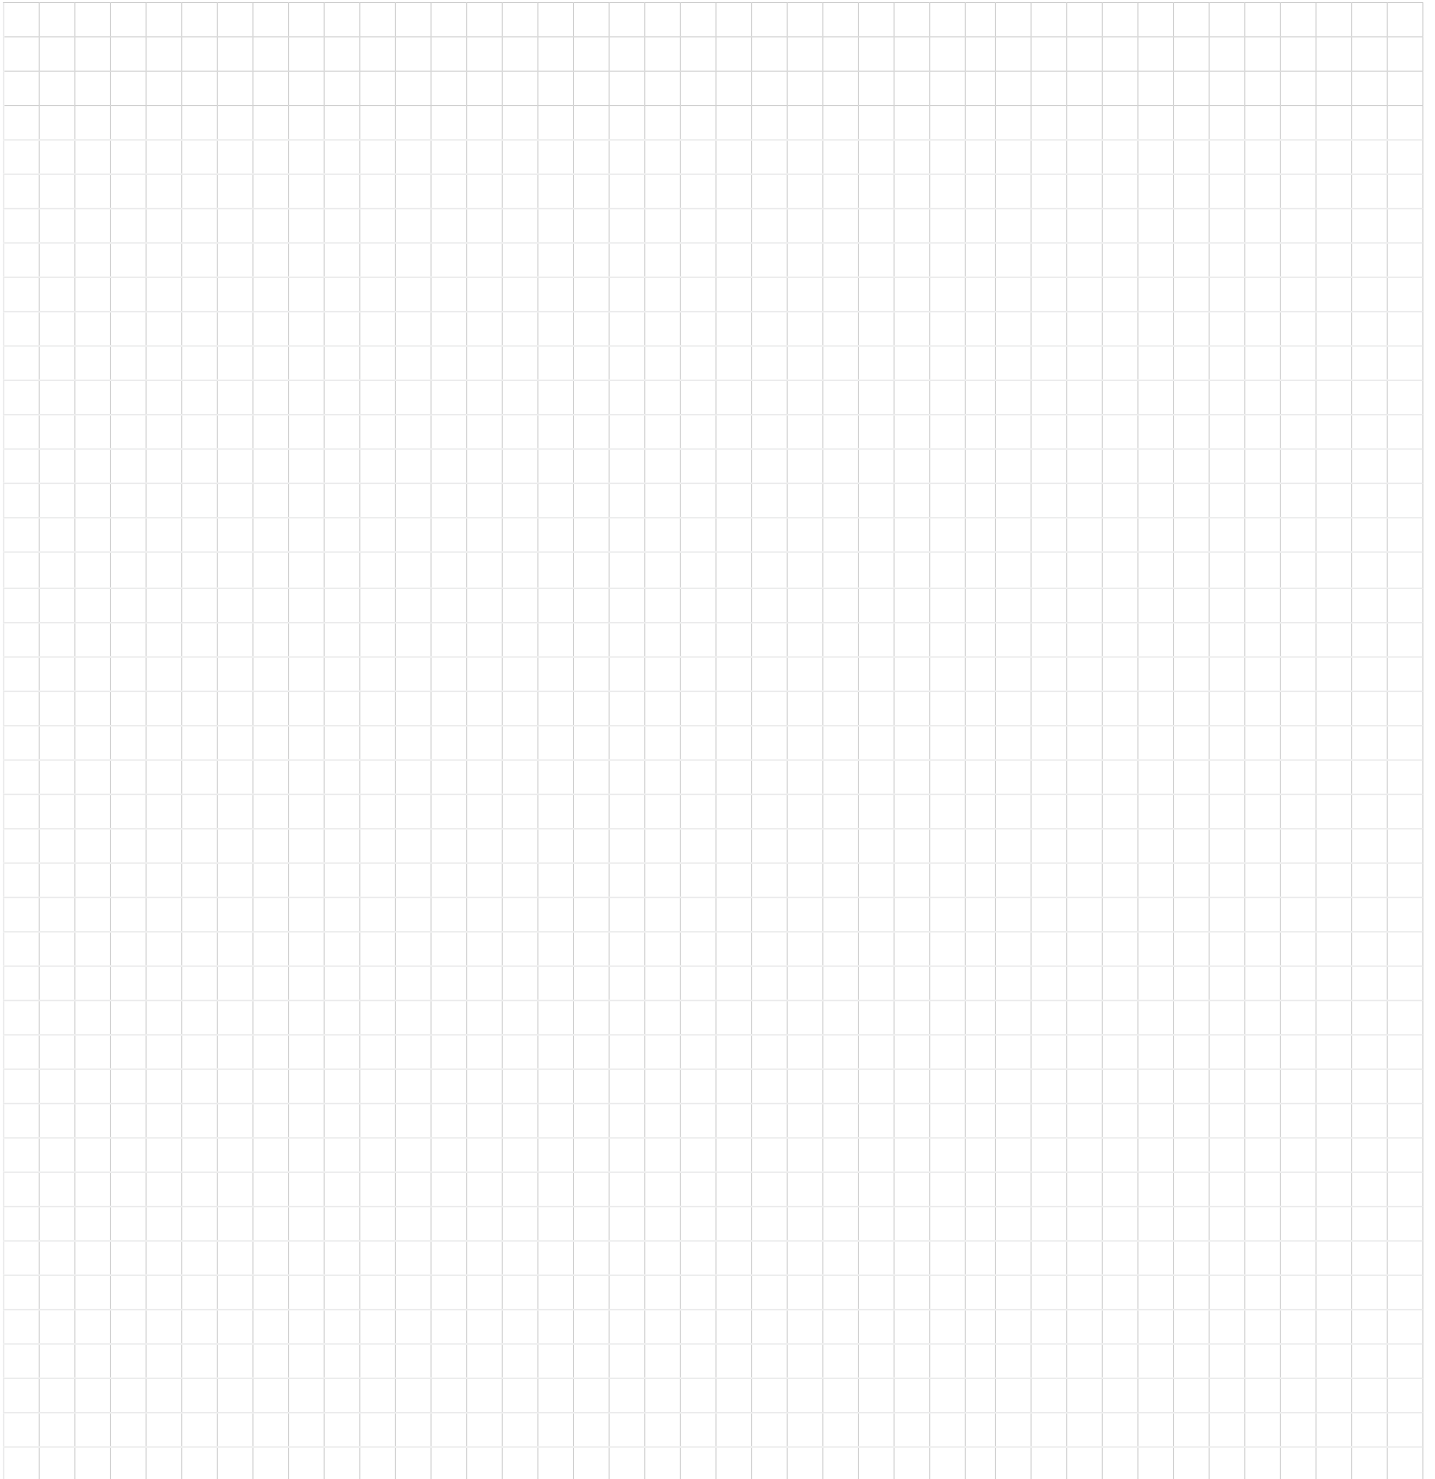A large grid area for drawing elevations, consisting of a 30x30 grid of small squares. The grid is intended for the user to draw the elevations of their walls, marking them with letters A, B, C, D, etc., and including window and door sizes and distances from the eaves and floor.

