

ORDER FORM



ORDER e: rooforders@wendland.uk.com

QUOTE e: rooforders@wendland.uk.com

New Build Replacement Project

PLEASE SKETCH YOUR PREFERRED DESIGN HERE

- mark window, door & wall positions/types.

INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING

DIMENSIONS Internal frame to internal frame

ROOF U-VALUE: 0.15 (standard) 0.12 (thermally enhanced)

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

PLAN VIEW

FRONT ELEVATION

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

Site Postcode

Roof Pitch

CUSTOMER NOTE: Please carefully read the Ultrarroof Complete Guide to Selling, Surveying and Specifying before filling in order details.

HOW TO PLACE AN ORDER FOR ULTRAROOOF:

LEFT ELEVATION

RIGHT ELEVATION

1. Sketch plan & elevations.
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
 - a) roof windows (vents) or velux
 - b) rectangular glazed panels.
4. Upon placement of your Ultrarroof order, an order confirmation is generated which must be signed and emailed back.

NOTES:

Please see p29 of Ultrarroof guide to selling, surveying and specifying for list of what IS / IS NOT included

Please sign and return to
rooforders@wendland.uk.com SIGNED

DATE

ORDER FORM



JOB REFERENCE

ULTRAROOF TILE

TILE COLOUR

Carbon grey Harvest brown Terra brick

RIDGE / CAPS COLOUR

Grey Red Brown

METROTILE

METROTILE COLOUR

Charcoal Ebony Burnt umber Antique red

RIDGE / CAPS COLOUR

Grey Red Burnt umber

GUTTER

- White Black Grey Brown Caramel

SOFFIT

- White Black Grey Rosewood Light Oak

DOWNPIPE

- Round Square
- White Black Grey Brown Caramel

CORNICE (Curved ONLY)

- Yes Grey White

FRAME STIFFENER (Always supplied* on gable roofs, recommend on lean-to's above door sets - please confirm frame colour)

- Yes No Internal colour External colour

STRUCTURAL GALLOWS BRACKET FOR BOX BEAM

(if design needs one, check survey guide)

- QTY

GABLE BOLSTER

(If ticked, please confirm frame colour)

- To be specified if there are any doors in the gable.

Soffit size (if there is one)

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

- | Low Solar Gain | Medium Solar Gain | High Solar Gain |
|--|---|-----------------------------------|
| <input type="checkbox"/> Ultimate Blue
<input type="checkbox"/> Aqua 4S | <input type="checkbox"/> Bronze 4S
<input type="checkbox"/> Blue 4S
<input type="checkbox"/> Neutral 4S | <input type="checkbox"/> Clear 4S |

Good Thermal Efficiency

- | Low Solar Gain | Medium Solar Gain | High Solar Gain |
|-----------------------------------|--|------------------------------------|
| <input type="checkbox"/> Std Aqua | <input type="checkbox"/> Std Bronze
<input type="checkbox"/> Std Blue
<input type="checkbox"/> Std Neutral | <input type="checkbox"/> Std Clear |

VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)

Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

- CK01 CK02 CK04 CK06

ROOF VENTS AND MECHANISM (mark plan)

Roof vent up to ridge Roof vent with glass above

- Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole
- Chrome Manual Spindle Manual Spindle and pole
- Electric motor with digital thermostat and rain sensor Electric motor and rocker switch
- Electric motor with radio and remote control Electric motor with thermostat (AVTD002)
- Electric without switch/thermostat (Motor only)

ANCILLARY EXTRAS

The installer is responsible for ensuring that where Ultrarroof is supported by means such as masonry or timber/ PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through Ultrarroof's technical documentation/guides. Wendland is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

For further guidance please contact the Technical Support Team on 01200 452918 or email techsupport@wendland.uk.com

Job No. 3598 / Page 2 of 6

Please sign and return to

rooforders@wendland.uk.com

SIGNED


DATE

ORDER FORM

JOB REFERENCE

Ultrarroof on frames

40mm soffit




Brick & Block



hup!

151.5mm soffit




Brick & Block



hup!

Ultrarroof on walls

72.5mm soffit




Brick & Block




hup!

Large soffits



Brick & Block




hup!

Boundary wall options - Brick & block only



-190mm soffit

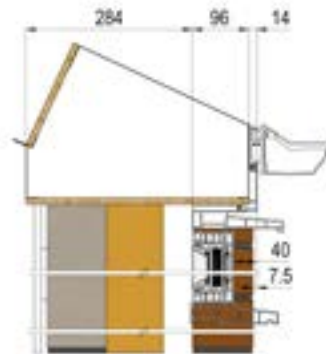

0 soffits

Order Form



2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

