Glass Roof Order Form



QUOTE e: rooforders@wendland.uk.com

New Build Replacement Project PLAN VIEW



ACCOUNT No.	ACC	OUI	NT	No.
-------------	-----	-----	----	-----

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

FRONT ELEVATION

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

*Required for structural snow / wind loading

*Site Postcode

Roof Pitch (°)

Roof height restriction

Frame width

CUSTOMER NOTE: Please carefully read the installation guide before filling in order details

LEFT ELEVATION

RIGHT ELEVATION

HOW TO PLACE AN ORDER FOR GLASS ROOF:

- Sketch plan & elevations.
 (If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
- Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
- 3. Mark the preferred positions of any a) roof windows
- Upon placement of your Wendland roof order, an order confirmation is generated which must be signed and emailed back.

In order to pass building regulations, all conservatory over 2.5m wide will need a glass U-value of at least 1.2. Smaller conservatories will need glass to be specified with 1.0 U-value. The thermal design guide within UDesign will provide the specific U-Value of each glass roof.

Job No.3598

Glass Roof Order Form



JOB REFERENCE

ROOF COLOUR White Deeplas Grey Golden Oak Rosewood Black Bespoke RAL/BS Colour (RAL9003) (SC050E) (RAL7016) (RAL8003) (RAL8017)

External Internal

INTERNAL PELMET

Specify with this order Upgrade with retro fit Standard Width (300-600mm) Other (600-1200mm)

Original roof job no. if applicable:

Please state (mm):

ROOF INFORMATION (INTERNAL PELMET) DOWNPIPE

On Fascia* Below Fascia Full Height Walls Round Square

If fitting to a bungalow please indicate Soffit Depth CONSERVAFLASH BAR UNDERCLADDINGS

N.B. If order is retro fit then option of **on fascia** is the only option available.

Soaker Only

Standard (uPVC)

GUTTER COVER - CURVED Yes

Colour Cream White Grev RAL/BS Colour

TIE BARS

White Tie Bar Brass

TOP CAPPINGS EAVES BEAM OPTIONS BOX GUTTER OPTIONS

Chambered Standard Eaves flow (eaves beam trickle ventilation) 165mm Box Gutter
Standard Gable beam Dentil moulding - clip in 265mm Box Gutter

Square (Square only Bi-fold support beam Dentil moulding - adhesive 165mm Chambered Box Gutter

available on Lean To's)

Eaves Super bolster Dentil packer 60mm frame Reinforced Box Gutter

Combined bolstered eaves Dentil packer 70mm frame Other, please state:

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass Good Thermal Efficiency

Low Solar GainMedium Solar GainHigh Solar GainLow Solar GainMedium Solar GainHigh Solar GainUltimate BlueBronze 4SClear 4SStd AquaStd BronzeStd Clear

Aqua 4S Blue 4S Std Blue
Neutral 4S Std Neutral

POLYCARBONATE UNGLAZED

Size 32mm (only available on Chambered cappings) 32mm 25mm Polycarb 25mm (only available Clear Colour Onal Bronze Bronze / Opal Heatguard / Opal Glass 24mm on Chambered

ROTABOND SEALANT - MS POLYMER

White (NCGS001W) Black (NCGS001B) No. Tubes Req: N.B. For use with Conservaglass

ROOF VENTS AND MECHANISM (mark plan)

Roof vent up to ridge Roof vent with glass above

Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole

Chrome Manual Spindle Manual Spindle and pole

Electric motor with radio and remote control Electric motor with thermostat (AVTD002)

Electric without switch/thermostat (Motor only)

SUPPORT BRACKETS DECORATION

Gallow Bracket How Many? Cresting and finial

Hanging Bracket How Many?

Custom Gallow Bracket How Many?

ANCILLARY EXTRAS

Job No.3598

cappings)

Please sign and return to p2 of 2

Order Form



hup! Base DPC to ground level

dimension required

Base DPC is usually

door cill if aligning floor levels with the house.

1. Base

Are you using the hup! Base? Yes No

If yes, please answer the questions below: What height is the base DPC to ground?

Which foundations will you be using? Pads Ground screws
Which skirt finish do you require? Plain Brick slips (brick type)

If you would like brick slips, please let us know the brick type and mortar colour.

Brick type Red Multi Smooth Anthracite Smooth Red Rustic Buff Multi

Mortar colour Grey Sand Red

Intrusions needed (please mark on the base plan below) Drain cover Obstruction Drain Pipes

Please draw the footprint of your building marking each elevation A, B, C, D etc. If you are using full height walls from base, you should use the base datum which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. If you are using hup! on existing walls, please complete the below details. See specification guide for more details.

If you have a sloping skirt, please draw it on the diagram, giving a measurement every meter.

hup! on existing wall

Is hup! going on a existing wall? Yes No What is the thickness of existing wall? $_{\rm mm}$

Do you want it on cill or full clad? Cill (use internal frame dimension) Full Clad (use external base dimension)

If on cill, please send over ONLY the internal frame dimension. If using full clad, please send over ONLY the external base dimensions.



Extended Base Tray required?

Width of Cavity wall 300mm. See hup! Specification Guide for more details.

Please note hup! walls will protrude at least 45mm (25mm for battens, plus c15mm depending on claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.


Order Form



2. Elevations


Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

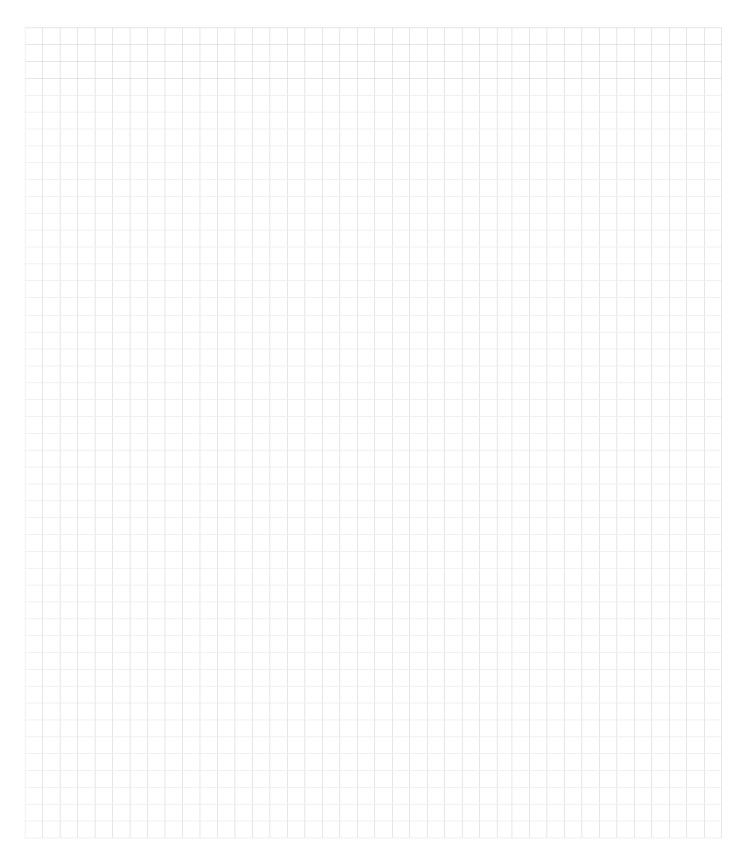

Order Form



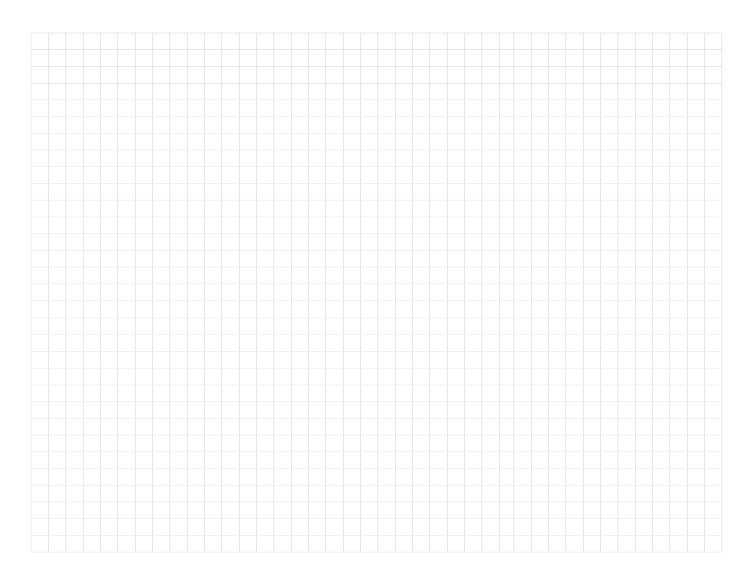

3. Wall Finishes

Depending on the wall finish can change the sequence of the battens and calcium silicate board, please tick the wall finish for this project?

Brick Slips Render External Cladding - Type

4. Walling kit

Please tick the box to confirm which elements of the walling kit you will require to be supplied by Ultraframe.

None - I am supplying my own Ventilation trim only

Aperture trim only Batten kit (includes battens and fixings)

Render Board kit (includes ventilation trim, aperture trims and battens)

Brick Slip Rails (includes trims, battens and render board. Brick slips not supplied)

5. Aperture Trim Colour

White Smooth Grey Light Oak Rosewood

Surveyor's Details

If you would like us to lilise with your surveyor on this hup! order, please put contact details below.

NAME:

CONTACT NO:

EMAIL ADDRESS: