

FLAT SKYLIGHT ORDER FORM

ORDER e: rooforders@wendland.uk.com

QUOTE e: rooforders@wendland.uk.com

New Build

Existing flat roof

Fill in the dimensions in the boxes below.

- Please note all dimensions are to the internal face of the kerb (excluding plasterboard).
- Measurement size of kerb height needs to be minimal 150mm (internal aperture).
- Slope / width is always the smallest size.

ACCOUNT No.

Company Name

Order Number


JOB REFERENCE

Company Contact

Telephone No.

Email

Delivery Address

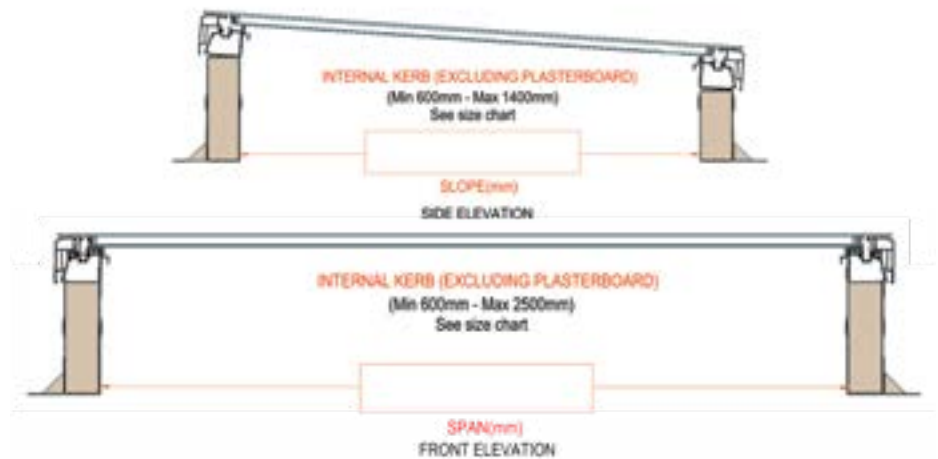

POSTCODE

Delivery Date Req

Quotation Ref

ROOF SPECIFICATION

STOCK FLAT SKYLIGHT: Choose a Flat Skylight from stock by ticking the below size. Lead time of 3-5 day lead time.

1000 x 1000 - Black frame I Blue Glass

1000 x 1500 - Black frame I Blue Glass

COLOUR: RAL9005 - 60% Black

RAL9003 - 80% White

RAL7016 - 30% Grey

Bespoke RAL:

PITCH: 4°

GLOSS %:

CONSERVAGLASS OPTIONS: Standard, 26mm or 28mm (glass size dependent of skylight size)

Clear

Blue

CUSTOMER NOTE: Please carefully read the Ultrasky Flat Skylight installation guide before filling in order details.

The minimum distance between flat skylights is 400mm

Glass Specification: The glass is either 26mm or 28mm depending on the size of the flat skylight. See price list for details. Available in Clear and Blue glass options.

Outer Layer - 6mm Clear/Blue Toughened / 16mm Argon filled cavity with warm edge spacer.

Inner Layer - 4mm or 6mm (size dependent) high performance, Low E, toughened.


Glass U-value: 1.0

Inner panes on glass units must be laminated in applications more than 5 metres above floor level or are located over a body of water

DISCLAIMER

The builder/installer is responsible for providing / checking structural deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. Not suitable to walk on the glass. If specifying overhead glass in Flat Skylights or Lanterns more than 5 meters above ground level or located over water (such as a swimming pool), laminated glass should be specified for the inner pane (as defined in British Standards).

Contact 01200 452918 for guidance.

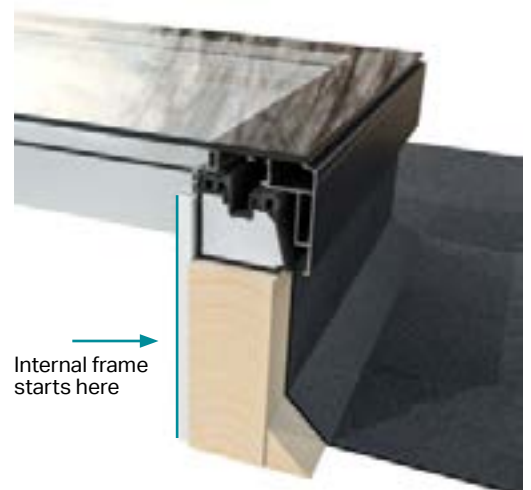

Job No.:3598

Please sign and return to

rooforders@wendland.uk.com

SIGNED

DATE

p1 of 1

Note: Upon placement of your Ultrasky Flat Skylight order, no drawing confirmation will be sent so please ensure information provided is accurate.