

Livinroof Order form



ORDER e: rooforders@wendland.uk.com

QUOTE e: rooforders@wendland.uk.com

New Build

Replacement Project

ROOF U-VALUE: 0.15 (standard) 0.12 (thermally enhanced)

PLAN VIEW

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

FRONT ELEVATION

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

*Required for structural snow / wind loading

*Site Postcode

Roof Pitch (°)

Roof height restriction

Frame width

CUSTOMER NOTE: Please carefully read the Livinroof System Overview Guide before filling in order details.

LEFT ELEVATION

How to place an order for a Livinroof

1. Fill in above information and sketch plan and elevations showing position and dimensions of walls, brick piers, windows, doors, cut outs and intrusions. If necessary, attach photos of existing property.
2. Advise of the preferred position of any roof vents, rainwater pipes (RWP), tie bars and any additional information that may assist in specifying your order. If a Goalpost is needed, please complete page 3 of this order form.
3. A confirmation drawing will be created using our bespoke software and sent to you via email for you to check and sign. This will start the manufacture process. A delivery date will be emailed back as soon as it is scheduled.

Wendland are committed to not only offering the very best products but the best Customer Service experience. If you have any questions, queries or concerns please feel free to contact us on **01200 452 904** or email us on rooforders@wendland.uk.com and we will help any way we can.

If you have a technical question relating to our products, please contact our technical team on **01200 452 918** or email us on techsupport@wendland.uk.com

You can also find technical help or any of our product literature on our website <https://www.wendland.uk.com/trade-downloads/>

Livinroof Order form



JOB REFERENCE

ROOF INFORMATION

On Fascia Below Fascia* Full Height Walls

If fitting to a bungalow please indicate Soffit Depth

*N.B. **Below fascia** is always on boxgutters, 30mm frame add on is needed but not supplied.

INTERNAL PELMET

Specify with this order Upgrade with retro fit Standard Width (300-600mm)

Original roof job no. if applicable:

EXTERNAL PANEL

☐ U-Tec through colour composite (to match 7016)

Aluminium powder coated sandwich (to match 7016)

CORNICE

Style	1 Tier	2 Tier	3 Tier	Curved		
Colour	White	Urban Grey	Deeplas White	Landmark Green	Pure Cream	RAL/BS Colour
	RAL 9003,	RAL 7016,	INTERPON SC050E,	BS14C35,	RAL 1015,	
	GLOSS 80%	GLOSS 30%	GLOSS 80%	GLOSS 80%	GLOSS 30%	Gloss %

BOX GUTTER OPTIONS:

165mm Box Gutter 265mm Box Gutter 165mm Chambered Box Gutter Reinforced Box Gutter Other, please state:

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Bronze 4S	Clear 4S
Aqua 4S	Blue 4S	
	Neutral 4S	

Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze	Std Clear
	Std Blue	
	Std Neutral	

ROTABOND SEALANT - MS POLYMER

Black Tubes (NCGS001B)

Downpipe

Round
Square

CONSERVAFLASH

Soaker Only
Yes

ROOF VENTS AND MECHANISM (mark plan)

Roof vent with glass above

Brass	Manual Spindle	Manual Spindle and pole	Manual Spindle and telescopic pole
Chrome	Manual Spindle	Manual Spindle and pole	

Electric motor with digital thermostat and rain sensor

Electric motor with radio and remote control

Electric without switch/thermostat (Motor only)

Electric motor and rocker switch

Electric motor with thermostat (AVTD002)

ANCILLARY EXTRAS

Please refer to the Livinroof Technical Guide.

IMPORTANT NOTE 1

The installer is responsible for ensuring that where Livinroof is supported by means such as timber/PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through our system overview. Wendland cannot be responsible for the structural adequacy of any existing building work used as part of an overall conversion. While assistance is provided, ultimate responsibility to secure Building Regulations / approvals lies with the retail installer.

IMPORTANT NOTE 2

U-Design is the final arbiter on price and specification decisions.

IMPORTANT NOTE 3

The Livinroof components have been designed and manufactured to meet the specification of each individual job. Any significant on site modifications particularly relating to the repositioning of any structural members will invalidate the product's warranty and compromise the structures integrity. If adjustments are required due to site conditions please consult Wendland. Tie Bars / Tie Beams will be specified by Wendland and will appear on your confirmation. Always check the confirmation carefully.

Goalpost specification

Goalpost Colour

To match roof internals


Bespoke:- RAL colour

Leg length

Frame height

Length below floor/cill

Goalpost leg example

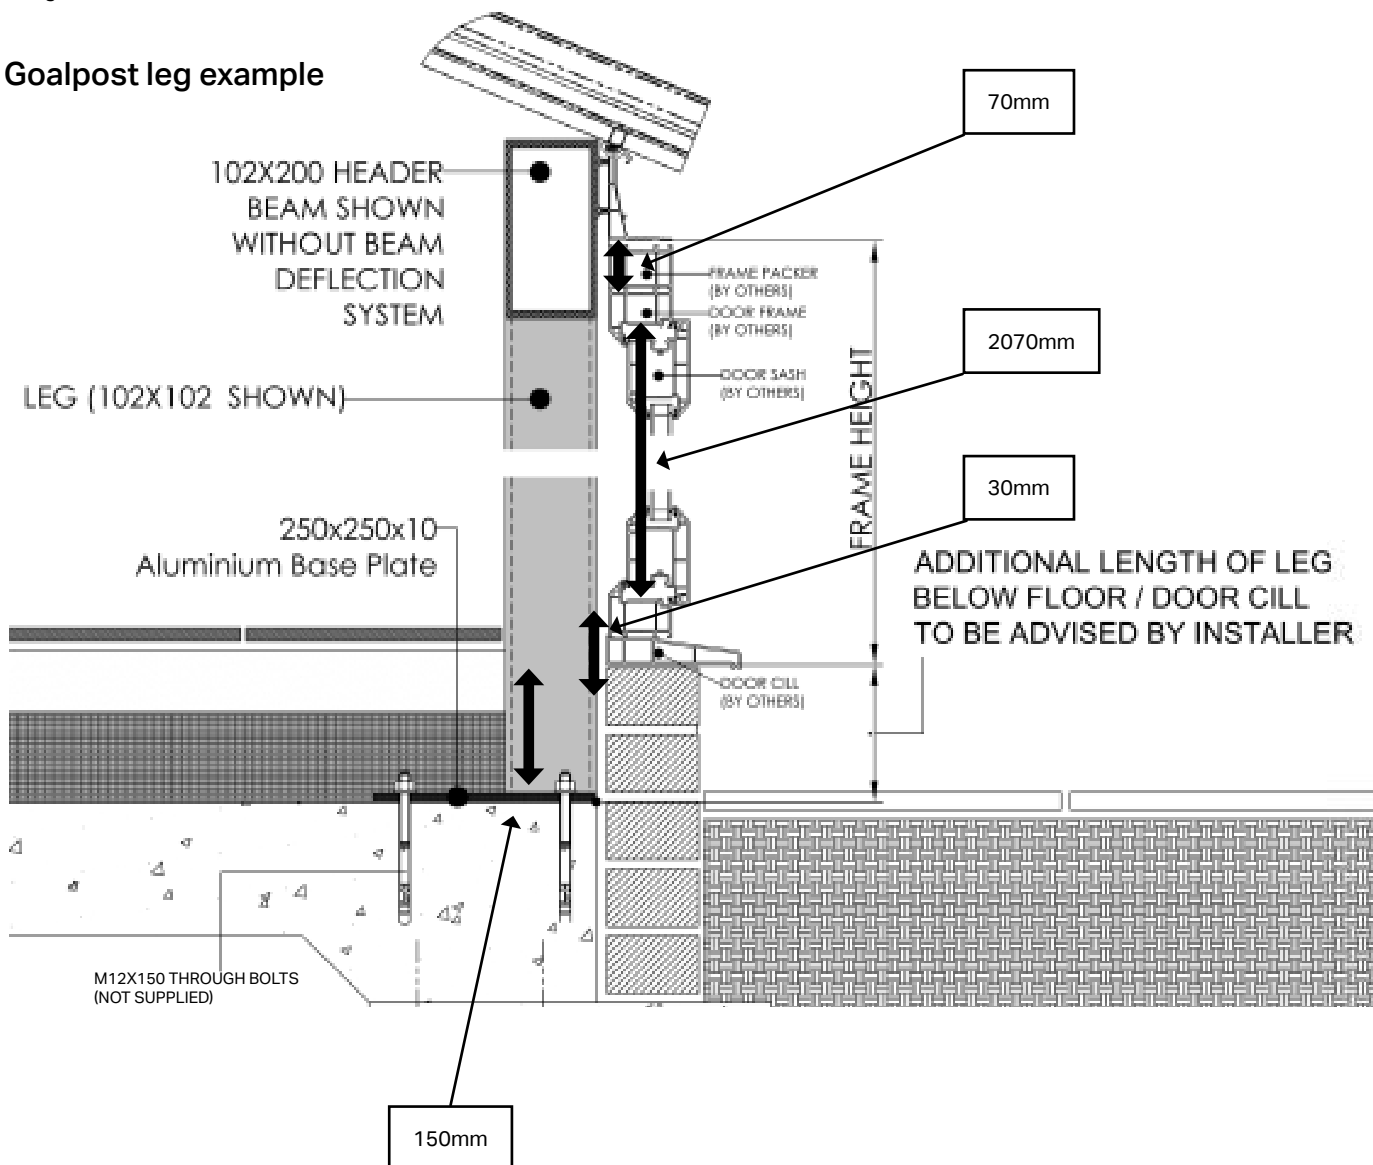

Disclaimer:

Wendland does not take responsibility for the structural stability of the entire structure, only the products provided by Wendland. To ensure the rest of the structure is suitable, it is the installers responsibility to ensure that all walls, foundations and building structure are compliant with Document A of Building Regulations. Any adjoining window frames must be a minimum of 70mm reinforced PVC frames, coupled in accordance with the manufacturer's recommendations. Host walls must be suitable to take the additional load and forces of the new building.

All beam end plates (WP and SP) must be bolted to a suitable substrate with adequate anchors. For the WP, the host wall suitability to accept the increased forces must be checked. The SP should be positioned on a suitable concrete padstone built into the supporting wall and strapped down to at least two additional courses.

Baseplates must be anchored using a minimum of 3no. M12 through bolts (minimum 6kN Tension/Uplift capacity per bolt). Foundations or floor slabs must be designed to accept the additional forces.

Order Form

1. Base

Are you using the hup! Base? Yes No

If yes, please answer the questions below:

What height is the base DPC to ground?

Which foundations will you be using? Pads Ground screws

If using ground screw, please indicate the name of your ground screw provider. GBGS Other supplier

Which skirt finish do you require? Plain Brick slips (brick type)

If you would like brick slips, please let us know the brick type and mortar colour.

Brick type	Red Multi	Smooth Anthracite	Smooth Red	Rustic Buff Multi
------------	-----------	-------------------	------------	-------------------

Mortar colour	Grey	Sand	Red
---------------	------	------	-----

Intrusions needed (please mark on the base plan below)	Drain cover	Obstruction	Drain Pipes
--	-------------	-------------	-------------

Please draw the footprint of your building marking each elevation A, B, C, D etc. If you are using full height walls from base, you should use the base datum which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. If you are using hup! on existing walls, please complete the below details.

See specification guide for more details.

If you have a sloping skirt, please draw it on the diagram, giving a measurement every metre.


hup! on existing wall

Is hup! going on a existing wall? Yes No

What is the thickness of existing wall? mm

Do you want it on cill or full clad? Cill (use internal frame dimension) Full Clad (use external base dimension)

If on cill, please send over **ONLY** the internal frame dimension. If using full clad, please send over **ONLY** the external base dimensions.

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin gray lines. There are 20 columns and 20 rows of squares, creating a total area of 400 square units. The grid covers most of the page, leaving a narrow white margin around the edges.

Extended Base Tray required?

Width of Cavity wall 300mm. See hup! Specification Guide for more details.

Please note: hup! walls will protrude at least 45mm (25mm for battens, plus c15mm depending on claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Please return to quotes@ultraframe.co.uk

Order Form



2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

Order Form

3. Wall Finishes

The type of wall finish can change the sequence of the battens and calcium silicate board, please tick the wall finish for this project?

Brick Slips

Render

External Cladding - Type

4. Walling kit

Please tick the box to confirm which elements of the walling kit you will require to be supplied by Ultraframe.

None - I am supplying my own

Ventilation trim only

Aperture trim only

Batten kit (includes battens and fixings)

Render Board kit (includes ventilation trim, aperture trims and battens)

Brick Slip Rails (includes trims, battens and render Board. Brick slips not supplied)

5. Aperture Trim Colour

White

Smooth Grey

Light Oak

Rosewood

Surveyor's Details

If you would like us to liaise with your surveyor on this hup! order, please put contact details below.

NAME:

CONTACT NO:

EMAIL ADDRESS: