

# ORDER FORM



**ORDER** e: [rooforders@wendland.uk.com](mailto:rooforders@wendland.uk.com)

**QUOTE** e: [rooforders@wendland.uk.com](mailto:rooforders@wendland.uk.com)

New Build

Replacement Project

**PLEASE SKETCH YOUR PREFERRED DESIGN HERE**

- mark window, door & wall positions/types.

**INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING**

**DIMENSIONS**

Internal frame to internal frame

**ROOF U-VALUE:**

0.15 (standard)

0.12 (thermally enhanced)

**PLAN VIEW**

**ACCOUNT No.**

Company Name

Order Number

**JOB REFERENCE**

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

**FRONT ELEVATION**

**POSTCODE**

Delivery Date Req

Quotation Ref

**CRITICAL INFORMATION**

**\*Required for structural snow / wind loading**

Site Postcode

Roof Pitch

*CUSTOMER NOTE: Please carefully read the Ultrarroof Complete Guide to Selling, Surveying and Specifying before filling in order details.*

**HOW TO PLACE AN ORDER FOR  
ULTRAROOF:**

**LEFT ELEVATION**

**RIGHT ELEVATION**

1. Sketch plan & elevations.  
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
  - a) roof windows (vents) or velux
  - b) rectangular glazed panels.
4. Upon placement of your Ultrarroof order, an order confirmation is generated which must be signed and emailed back.

**NOTES:**

Please see p29 of Ultrarroof guide to selling, surveying and specifying for list of what IS / IS NOT included

Please sign and return to

[rooforders@wendland.uk.com](mailto:rooforders@wendland.uk.com)

SIGNED

DATE

# ORDER FORM

## JOB REFERENCE



### ULTRAROOF TILE

#### TILE COLOUR

☐ Carbon grey      ☐ Harvest brown      ☐ Terra brick

#### RIDGE / CAPS COLOUR

☐ Grey      ☐ Red      ☐ Brown

### METROTILE

#### METROTILE COLOUR

☐ Charcoal      ☐ Ebony      ☐ Burnt umber      ☐ Antique red

#### RIDGE / CAPS COLOUR

☐ Grey      ☐ Red      ☐ Burnt umber

### GUTTER

☐ White      ☐ Black      ☐ Grey      ☐ Brown      ☐ Caramel

### SOFFIT

☐ White      ☐ Black      ☐ Grey      ☐ Rosewood      ☐ Light Oak

### DOWNPIPE

☐ Round      ☐ Square

☐ White      ☐ Black      ☐ Grey      ☐ Brown      ☐ Caramel

### CORNICE (Curved ONLY)

☐ Yes      ☐ Grey      ☐ White

### FRAME STIFFENER (Always supplied\* on gable roofs, recommend on lean-to's above door sets - please confirm frame colour)

☐ Yes      ☐ No      ☐ Internal colour      ☐ External colour

### STRUCTURAL GALLOWS BRACKET FOR BOX BEAM

(if design needs one, check survey guide)

☐ QTY .....

### GABLE BOLSTER

(If ticked, please confirm frame colour)

☐ To be specifed if there are any doors in the gable.

Soffit size (if there is one) .....

### GLASS OPTIONS - WARM EDGE SPACER

#### Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Bronze 4S	<input type="checkbox"/> Clear 4S
<input type="checkbox"/> Aqua 4S	<input type="checkbox"/> Blue 4S	
	<input type="checkbox"/> Neutral 4S	

#### Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze	<input type="checkbox"/> Std Clear
	<input type="checkbox"/> Std Blue	
	<input type="checkbox"/> Std Neutral	

### VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)

Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

☐ CK01      ☐ CK02      ☐ CK04      ☐ CK06

### ROOF VENTS AND MECHANISM (mark plan)

☐ Roof vent up to ridge      ☐ Roof vent with glass above

Brass      ☐ Manual Spindle      ☐ Manual Spindle and pole      ☐ Manual Spindle and telescopic pole  
Chrome      ☐ Manual Spindle      ☐ Manual Spindle and pole

☐ Electric motor with digital thermostat and rain sensor      ☐ Electric motor and rocker switch  
☐ Electric motor with radio and remote control      ☐ Electric motor with thermostat (AVTD002)  
☐ Electric without switch/thermostat (Motor only)

### ANCILLARY EXTRAS

The installer is responsible for ensuring that where Ultrarroof is supported by means such as masonry or timber/ PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through Ultrarroof's technical documentation/guides. Wendland is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

For further guidance please contact the Technical Support Team on  
01200 452918 or email [techsupport@wendland.uk.com](mailto:techsupport@wendland.uk.com)

Job No. 3598 / Page 2 of 6

Please sign and return to  
[rooforders@wendland.uk.com](mailto:rooforders@wendland.uk.com)

SIGNED


DATE

# ORDER FORM

JOB REFERENCE

## Ultrarroof on frames

40mm soffit



Brick & Block



hup!

151.5mm soffit




Brick & Block



hup!

## Ultrarroof on walls

72.5mm soffit




Brick & Block




hup!

Large soffits



Brick & Block




hup!

## Boundary wall options - Brick & block only



-190mm soffit

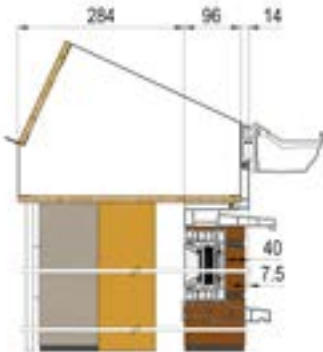

0 soffits

# Order Form

## 1. Base

Are you using the hup! Base?      Yes      No

If yes, please answer the questions below:

**What height is the base DPC to ground?**

Which foundations will you be using?      Pads      Ground screws

If using ground screw, please indicate the name of your ground screw provider. GBGS Other supplier .....

Which skirt finish do you require?      Plain      Brick slips (brick type)

If you would like brick slips, please let us know the brick type and mortar colour.

**Brick type**                      **Red Multi**                      **Smooth Anthracite**                      **Smooth Red**                      **Rustic Buff Multi**

Mortar colour	Grey	Sand	Red
---------------	------	------	-----

**Intrusions needed (please mark on the base plan below)**      **Drain cover**      **Obstruction**      **Drain Pipes**

Please draw the footprint of your building marking each elevation A, B, C, D etc. If you are using full height walls from base, you should use the base datum which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. If you are using hup! on existing walls, please complete the below details.

**See specification guide for more details.**

If you have a sloping skirt, please draw it on the diagram, giving a measurement every metre.


## hup! on existing wall

Is hup! going on a existing wall?      Yes      No

What is the thickness of existing wall? mm

Do you want it on cill or full clad?      Cill (use internal frame dimension)      Full Clad (use external base dimension)

If on cill, please send over ONLY the internal frame dimension. If using full clad, please send over ONLY the external base dimensions.

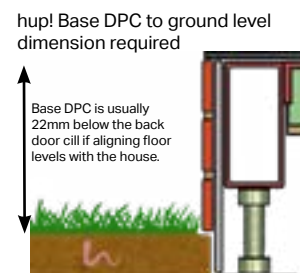[illegible]

**Extended Base Tray required?**

Width of Cavity wall 300mm. See hup! Specification Guide for more details.

Please note: hup! walls will protrude at least 45mm (25mm for battens, plus c15mm depending on claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Please return to [quotes@ultraframe.co.uk](mailto:quotes@ultraframe.co.uk)

# Order Form



## 2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

# Order Form

### 3. Wall Finishes

The type of wall finish can change the sequence of the battens and calcium silicate board, please tick the wall finish for this project?

## Brick Slips

Render

External Cladding - Type .....

#### 4. Walling kit

Please tick the box to confirm which elements of the walling kit you will require to be supplied by Ultraframe.

None - I am supplying my own

Ventilation trim only

Aperture trim only

Batten kit (includes battens and fixings)

Render Board kit (includes ventilation trim, aperture trims and battens)

Brick Slip Rails (includes trims, battens and render Board. Brick slips not supplied)

## 5. Aperture Trim Colour

White

Smooth Grey

Light Oak

Rosewood

## Surveyor's Details

If you would like us to liaise with your surveyor on this hup! order, please put contact details below.

NAME:

CONTACT NO:

EMAIL ADDRESS: