

# ORDER FORM



**ORDER** e: rooforders@wendland.uk.com

**QUOTE** e: rooforders@wendland.uk.com

New Build                      Replacement Project

**PLEASE SKETCH YOUR PREFERRED DESIGN HERE**

- mark window, door & wall positions/types.

**INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING**

**DIMENSIONS**                      Internal frame to internal frame

**ROOF U-VALUE:**                      0.15 (standard)                      0.12 (thermally enhanced)

**ACCOUNT No.**

Company Name

Order Number

**JOB REFERENCE**

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

**PLAN VIEW**

**FRONT ELEVATION**

**POSTCODE**

Delivery Date Req

Quotation Ref

**CRITICAL INFORMATION**

**\*Required for structural snow / wind loading**

Site Postcode

Roof Pitch

*CUSTOMER NOTE: Please carefully read the Ultrarroof Complete Guide to Selling, Surveying and Specifying before filling in order details.*

**HOW TO PLACE AN ORDER FOR ULTRAROOOF:**

**LEFT ELEVATION**

**RIGHT ELEVATION**

1. Sketch plan & elevations.  
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
  - a) roof windows (vents) or velux
  - b) rectangular glazed panels.
4. Upon placement of your Ultrarroof order, an order confirmation is generated which must be signed and emailed back.

**NOTES:**

Please see p29 of Ultrarroof guide to selling, surveying and specifying for list of what IS / IS NOT included

Please sign and return to  
**rooforders@wendland.uk.com**      SIGNED

DATE

# ORDER FORM

## JOB REFERENCE

### ULTRAROOF TILE

#### TILE COLOUR

Carbon grey     Harvest brown     Terra brick

#### RIDGE / CAPS COLOUR

Grey     Red     Brown

### METROTILE

#### METROTILE COLOUR

Charcoal     Ebony     Burnt umber     Antique red

#### RIDGE / CAPS COLOUR

Grey     Red     Burnt umber

### GUTTER

White     Black     Grey     Brown     Caramel

### SOFFIT

White     Black     Grey     Rosewood     Light Oak

### DOWNPIPE

Round     Square

White     Black     Grey     Brown     Caramel

### CORNICE (Curved ONLY)

Yes     Grey     White

### FRAME STIFFENER (Always supplied\* on gable roofs, recommend on lean-to's above door sets - please confirm frame colour)

Yes     No    Internal colour    External colour

### STRUCTURAL GALLOWS BRACKET FOR BOX BEAM

(if design needs one, check survey guide)

QTY .....

### GABLE BOLSTER

(if ticked, please confirm frame colour)

To be specified if there are any doors in the gable.

Soffit size (if there is one) .....

### GLASS OPTIONS - WARM EDGE SPACER

#### Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Bronze 4S	<input type="checkbox"/> Clear 4S
<input type="checkbox"/> Aqua 4S	<input type="checkbox"/> Blue 4S	
	<input type="checkbox"/> Neutral 4S	

#### Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze	<input type="checkbox"/> Std Clear
	<input type="checkbox"/> Std Blue	
	<input type="checkbox"/> Std Neutral	

### VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)

Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

CK01     CK02     CK04     CK06

### ROOF VENTS AND MECHANISM (mark plan)

Roof vent up to ridge    Roof vent with glass above

Brass     Manual Spindle     Manual Spindle and pole     Manual Spindle and telescopic pole

Chrome     Manual Spindle     Manual Spindle and pole

Electric motor with digital thermostat and rain sensor     Electric motor and rocker switch  
 Electric motor with radio and remote control     Electric motor with thermostat (AVTD002)  
 Electric without switch/thermostat (Motor only)

### ANCILLARY EXTRAS

The installer is responsible for ensuring that where Ultrarroof is supported by means such as masonry or timber/ PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through Ultrarroof's technical documentation/guides. Wendland is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

**For further guidance please contact the Technical Support Team on 01200 452918 or email [techsupport@wendland.uk.com](mailto:techsupport@wendland.uk.com)**

Job No. 3598 / Page 2 of 6

Please sign and return to

[rooforders@wendland.uk.com](mailto:rooforders@wendland.uk.com)

SIGNED

DATE


# ORDER FORM

JOB REFERENCE


## Ultrarroof on frames

40mm soffit


151.5mm soffit




Brick & Block



hup!



Brick & Block




hup!


## Ultrarroof on walls

72.5mm soffit


Large soffits




Brick & Block



hup!




Brick & Block




hup!

## Boundary wall options - Brick & block only

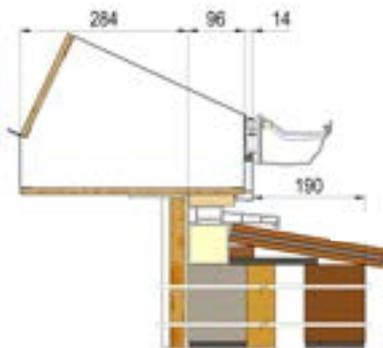

-190mm soffit

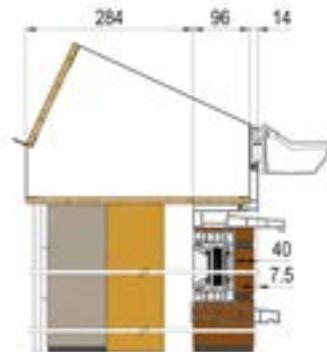

0 soffits



# Order Form



## 2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

A large, empty grid area for drawing wall elevations. The grid consists of 30 columns and 40 rows of small squares, providing a space for the customer to draw their wall elevations, including window and door sizes and distances from the eaves and floor.

