

LANTERN ORDER FORM

ORDER e: rooforders@wendland.uk.com

QUOTE e: rooforders@wendland.uk.com

Please sketch your lantern here.

- Please note all dimensions are to external face of timber kerb.
- Upon placement of your lantern order, an order confirmation will be generated which must be signed and emailed back.
- Please carefully read the lantern installation guide before filling in order details.

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Company Contact


Telephone No.

Email

Delivery Address

PLAN VIEW

example:

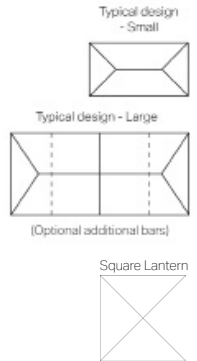

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

*Site Postcode

Please tick if height is greater than one storey.

Height above ground level

SPECIFICATION

1. Set out is always measured to external face of timber kerb.
2. Timber kerb should be a minimum of 150mm x 70mm wide (not supplied).
3. Width up to 4000 mm, length up to 6000mm (ext kerb sizes, min 100mm difference between width & length).
4. Square Lantern - Smallest 500mm x 500mm, Largest 4000mm x 4000mm
4. Fixed pitch of 20 degree.
5. Double ended hipped (rectangle shape).
6. Supplied glazed or unglazed for 24 mm sealed units - glazing overhangs, no gutter.
7. We will always design with the minimum number of bars - if you require additional and specific bars, please mark on drawing above.

ROOF MATERIALS	PVCu White	PVCu Smooth Grey	PVCu Black 9005 Black 60%	Aluminium 9003 White 80% gloss	Aluminium 7016 Grey 30% gloss	Aluminium 9005 Black 60% gloss	Bespoke RAL/BS Colour
External						
Internal						

ROTABOND SEALANT - MS POLYMER (N.B. For use with glass)

Black (RS7101BL) No. Tubes Req:

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Bronze 4S	Clear 4S
Aqua 4S	Blue 4S	
	Neutral 4S	

Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze	Std Clear
	Std Blue	
	Std Neutral	

ROOF VENTS AND MECHANISM (mark plan)

Roof vent to ridge Roof vent with glass above Roof vent to ridge and eaves beam

Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole

Chrome Manual Spindle Manual Spindle and pole

Electric motor with digital thermostat and rain sensor

Electric motor and rocker switch

Electric motor with radio and remote control

Electric motor with thermostat (AVTD002)

Electric without switch/thermostat (Motor only)

DISCLAIMER

The builder/installer is responsible for providing / checking structural timber deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. Contact your local building authority. You will need to follow the below specification in regards to glass U-value in order to pass building regulations. Please refer to the Thermal Design Guide in for a confirmed U-value of each product.

- If your lantern is less than 750mm (w) - 0.9 U-value or less glass is required.
- If your lantern is between 750mm to 1000mm (w) - At least 1.0 U-value glass is required.
- If your lantern is larger than 1000mm (w) - At least 1.2 U-value glass is required.

Job No.:3598

Please sign and return to
rooforders@wendland.uk.com

SIGNED

DATE